## Paper / Subject Code: 37002 / DISTRICT TIME SIGNAL PROCESSING

T.E. SEM VI / ELTL / CREDIT BASE / MAY 2019 / 16.05.2019

Q. P. Code: 27083

## [Time: Three Hours]



N.B.: (1) Question No.1 is compulsory.

- (2) Attempt any three out of remaining questions.
- (3) Assume suitable data wherever required.
- Q.1 a. State Parseval's relation in z-transform.

- b. Assume two finite duration sequences  $x_1(n)$  and  $x_2(n)$  are linearly combined. Let  $x_3(n) = ax_1(n) + bx_2(n)$ . What is the DFT of  $x_3(n)$ ?
- c. What is the need for employing window technique for FIR filter design?
- (05)
- d. What is the need for anti-aliasing filter prior to downsampling?
- (05)
- Q.2.a. Design an FIR filter approximating the ideal frequency response

$$H_d(e^{jw}) = e^{-j3w}$$
 for  $\frac{-\pi}{4} |\omega| \le \frac{\pi}{4}$ 

for 
$$\frac{-\pi}{4} |\omega| \leq \frac{\pi}{4}$$

$$=0 for \frac{\pi}{4} \le |\omega| \le \pi$$

Using Hamming window with N=7.

- b. Derive the DFT of the sample data sequence  $x(n) = \{1,1,2,2,3,3\}$  and compute the corresponding amplitude and phase spectrum.
- (10)
- Q.3.a. Determine 8 point DFT for a continuous time signal,  $x(t) = \sin(2nFt)$  with
- (10)

F = 50Hz using DIF FFT algorithm.

b. Design a Butterworth filter using the impulse variance method for the following specifications

$$0.9 \le |\mathsf{H}(e^{jw})| \le 1$$

$$0 \leq \omega \leq \, 0.3 \pi$$

$$|\mathrm{H}(e^{jw})| \leq 0.1$$

$$0.7 \, \pi \leq \omega \leq \pi$$


Q.4.a. Determine the Direct form-I and Direct form-II realization for the system (10)y(n) = -0.1y(n-1) + 0.2y(n-2) + 3x(n) + 3.6x(n-1) + 0.6x(n-2).

[TURN OVER]

Page 1 of-2

Q. P. Code: 27083

b. A multirate system is shown below in Fig.1. Find the relation between x(n) and y(n).

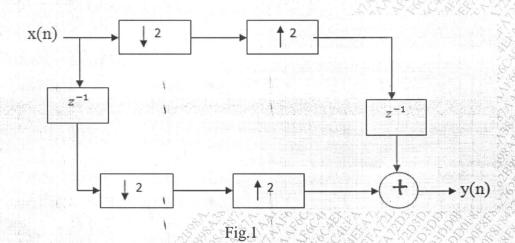

- Q.5 a. Determine the periodogram of the random signal by taking 8 samples of the signal  $x(n) \cos 2\pi f_1 n + \cos 2\pi (f_1 + \Delta f) n$ ,  $f_1 = 0.2$ ,  $\Delta f = 0.05$ .
  - b. The transfer function  $H(z) = H_1(z)H_2(z)$  where (10)

$$H_1(z) = \frac{1}{1 - a_1 z^{-1}}$$
 and  $H_2(z) = \frac{1}{1 - a_2 z^{-1}}$ 

- Assume  $a_1 = 0.5$  and  $a_2 = 0.6$ , find the output roundoff noise power. (10)
- Q.6. Write short notes on following,
  - a. Musical Sound Processing. (07)
  - b. Dual tone multi frequency signal detection. (06)
  - c. Subband Coding of Speech signals. (07)

\*\*\*\*\*\*\*\*\*\*\*\*\*\*